




Aile tandem

Ref. 13413


Ailes destinées au montage sur remorques double-essieu.
Etat de surface grainée et 3 nervures pour renforcer la rigidité du garde boue pour les versions JT650N et JTP98.

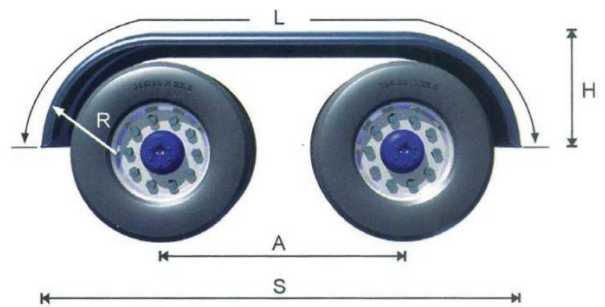

JT 650N + JTP 98

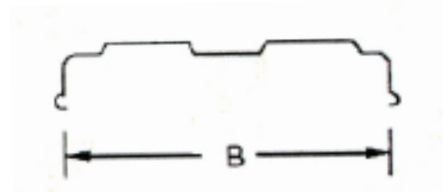

JT 610 + JT 65A

Type	(Bi) mm	(B) mm	(R) mm	(L) mm	(S) mm	(H) mm	(A) mm	
JT610	620	640	635	3290	2675	610	1370	9.00R20, 10.00R20, 11R22.5, 12.00R22.5
JT650N	650	670	635	3385	2670	620	1400	2.00R22.5, 11.00R20, E20, 12/80R22.5, 13R22.5, 315/80R22.5
JT65A	650	670	635	3570	2970	640	1625	12.00R22.5, 11.00R20, E20, 12/80R22.5
JTP98	650	670	635	2800	2490	410	1300	445/75R22.5